


SPECIFICATIONS

 **THERMO KING**

SPECIFICATION SHEET PRECEDENT® S-600

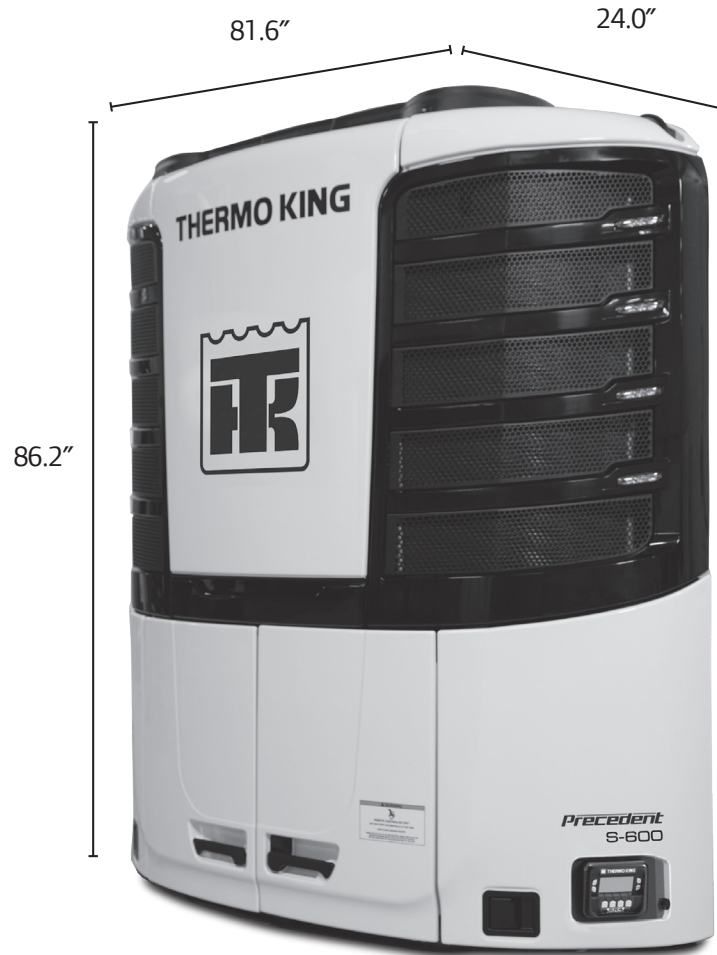

STANDARD FEATURES

- Smart Reefer® SR-4 controller for superior temperature control
- Factory equipped with TrackKing® Telematics for two-way electronic communication
- ServiceWatch enabled for maintenance monitoring
- OptiSet® Plus cargo profiles for maintaining product integrity
- Diesel Direct Electric (DDE) architecture for maximized fuel efficiency

OPTIONS

- Temperature data logger for enhanced load protection
- Customizable appearance
 - LED lighting kit
 - Chrome package

CARB/EPA COMPLIANCE

- California Air Resources Board (CARB): Evergreen Certification
The only Ultra Low Emissions Trailer Refrigeration Unit (ULETRU) in North America
- Complies with highest possible EPA standards (>25HP Tier IV)

S-600 SYSTEM PERFORMANCE

REFRIGERATION CAPACITY

(System net cooling capacity at 100°F ambient and high speed engine operation)

	Engine Power with ETV		Electric Power*	
	BTU/hr	Watts	BTU/hr	Watts
35°F	60,000	17,585	57,000	16,705
0°F	32,000	9,379	32,000	9,379
-20°F	19,000	5,569	19,000	5,569

*Thermo King offers several electric standby options. See your Thermo King dealer for specific unit performance on the option that best suits your needs.

Heating Capacity: System net heating capacity at 35/0°F ambient		Engine Power w/ETV
BTU/hr		59,500
Airflow Capacity		
Volume at 0 Pa static pressure		3,350 ft ³ /min
Engine: four cylinder, direct injection, liquid cooled		
Model		TK488CR
RPM at High Speed		2,050
RPM at Low Speed		1,250
Hp Rating at 2,050 RPM		33.0
Oil Capacity		12 qt
Maintenance Interval		3,000 hrs/4,000 hrs
Compressor: lightweight aluminum alloy body, heads and sump		
Model		X430L
Displacement		30.0 in ³
Refrigerant: (Zero Ozone Depletion Potential (ODP), internationally approved)		R452A
Charge		14.5 lbs
Weight		
System		1,888 lbs
50 gallon fuel tank (with bracket)		76 lbs

STANDARD FEATURES	OPTIONS
<ul style="list-style-type: none"> • Common rail fuel injection with real-time monitoring • 2-stage fuel filtration system • Fix-on-fail exhaust gas recirculation system • Microchannel condenser coils • 2-speed evaporator • Simple user interface with USB service diagnostics • 50-gallon aluminum undermount fuel tank w/visual fuel level gauge 	<ul style="list-style-type: none"> • Fresh air exchange • Arctic package • Severe duty package • ThermoLite® solar panels • Alternator, 65amp, 12Vdc • Battery charger • Supplemental power kit • SmartPower™ prep package • SmartPower™ electric standby <ul style="list-style-type: none"> - Standard and High Output (HO) options